

Patented May 11, 1960

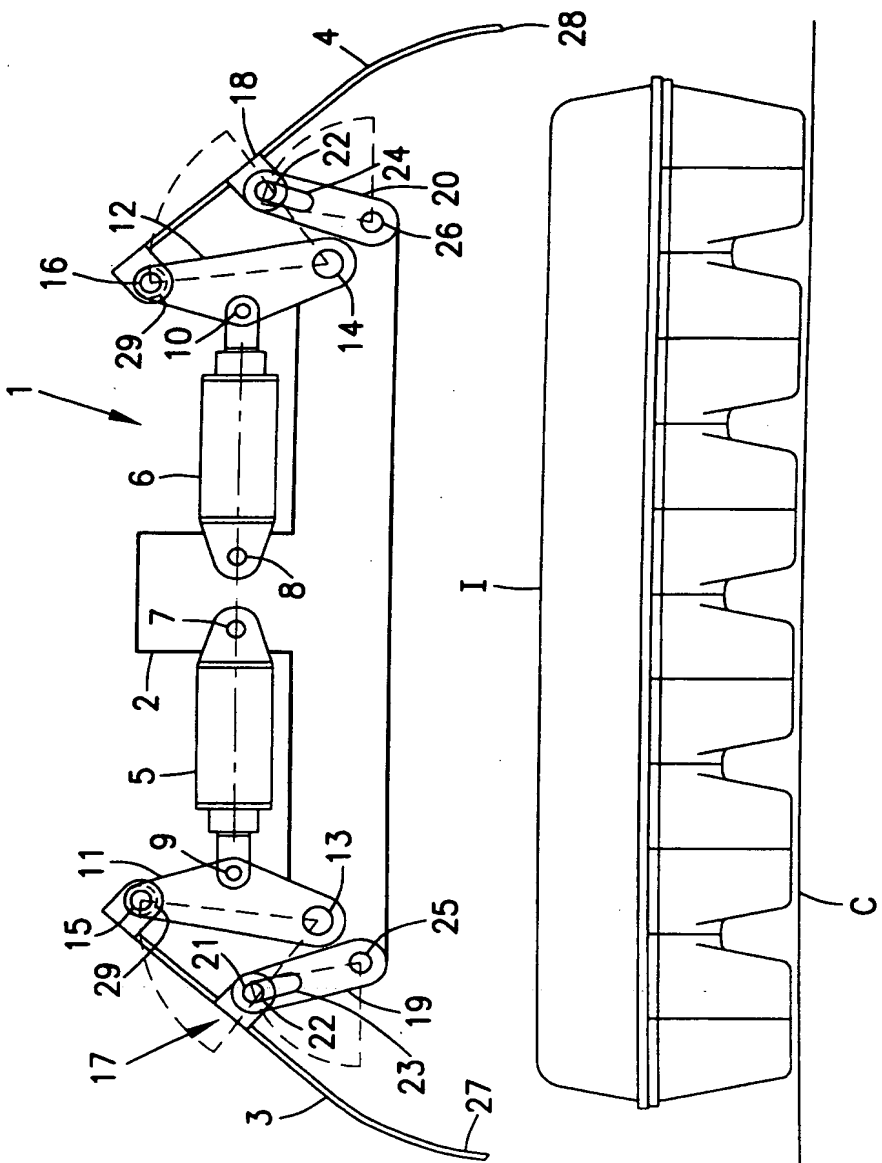
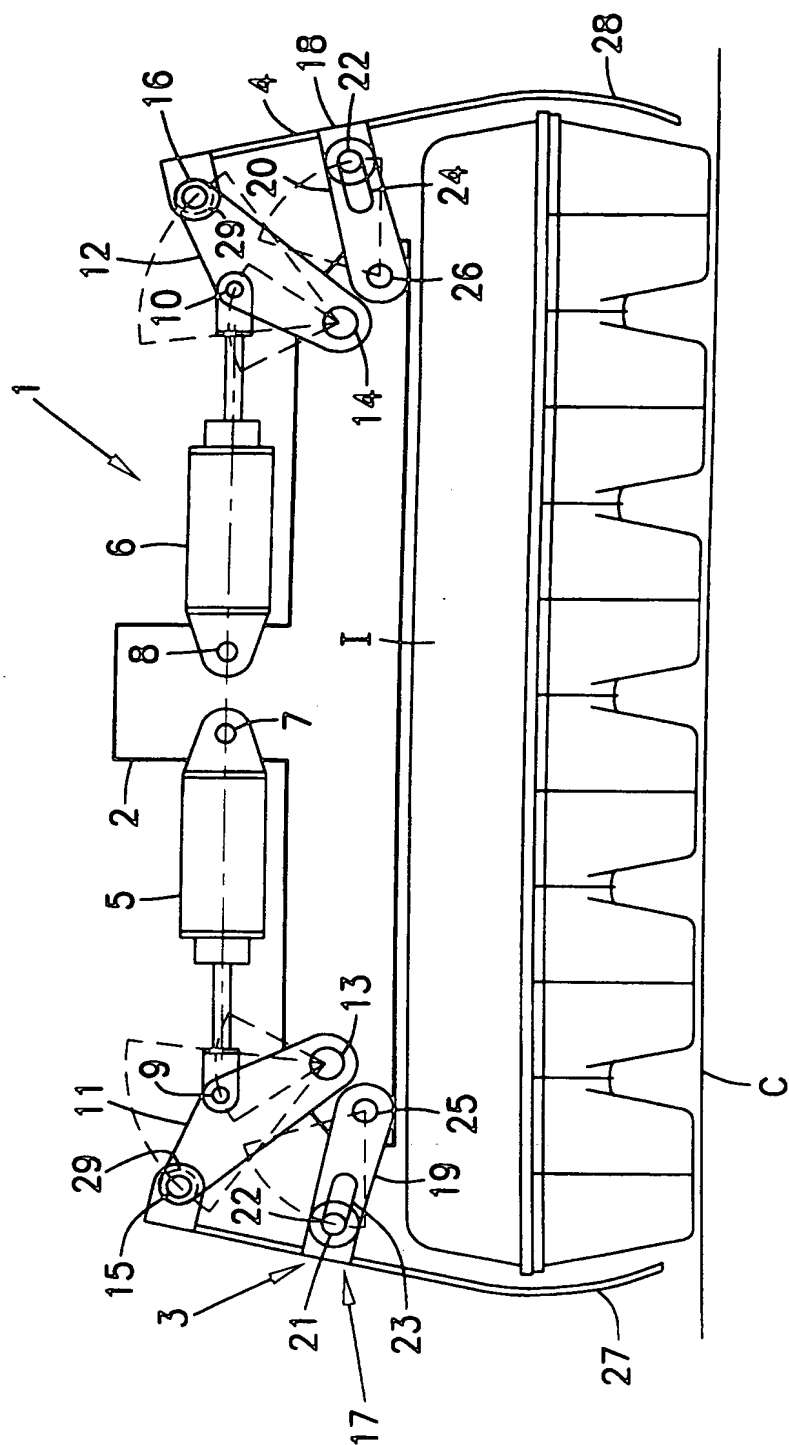


Fig. 1



2  
i  
i

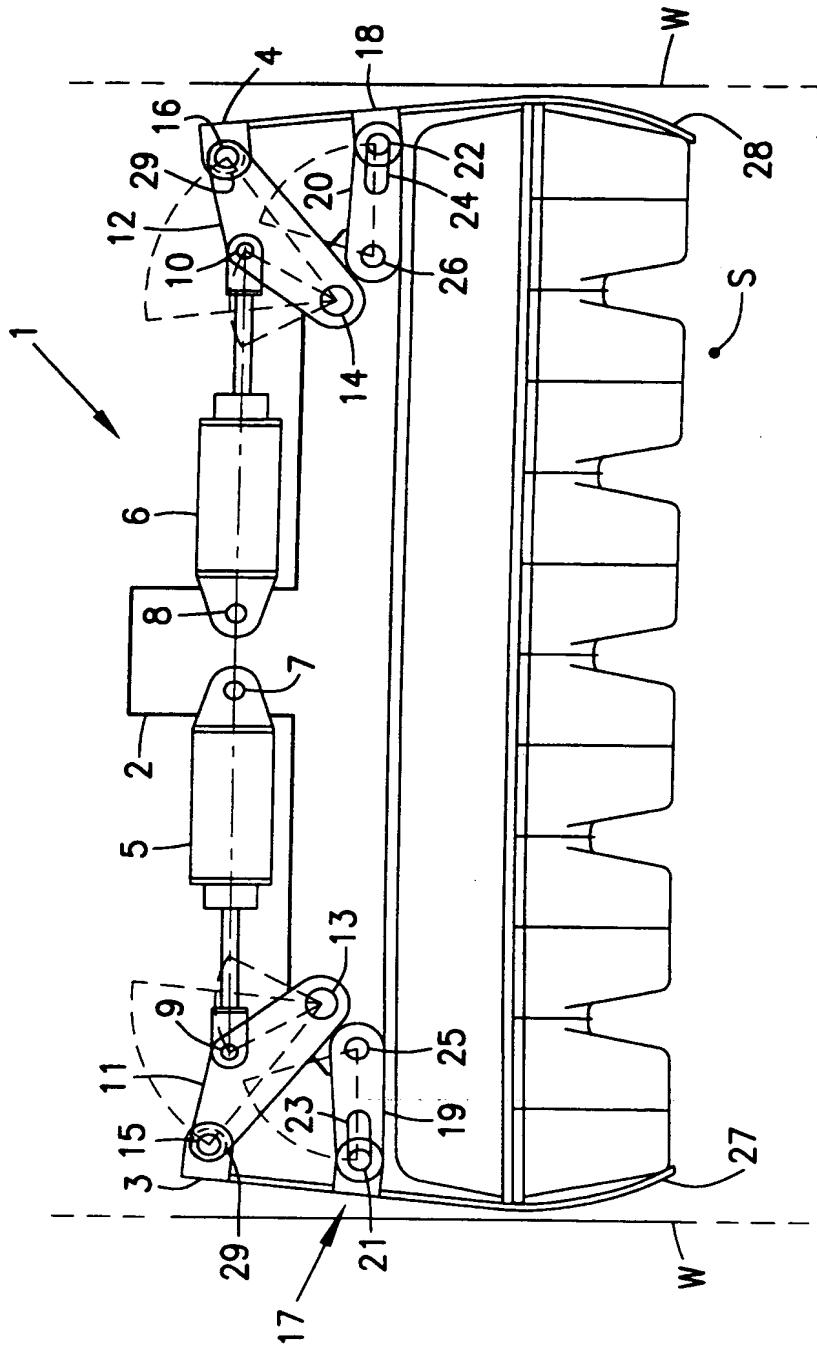


Fig. 3

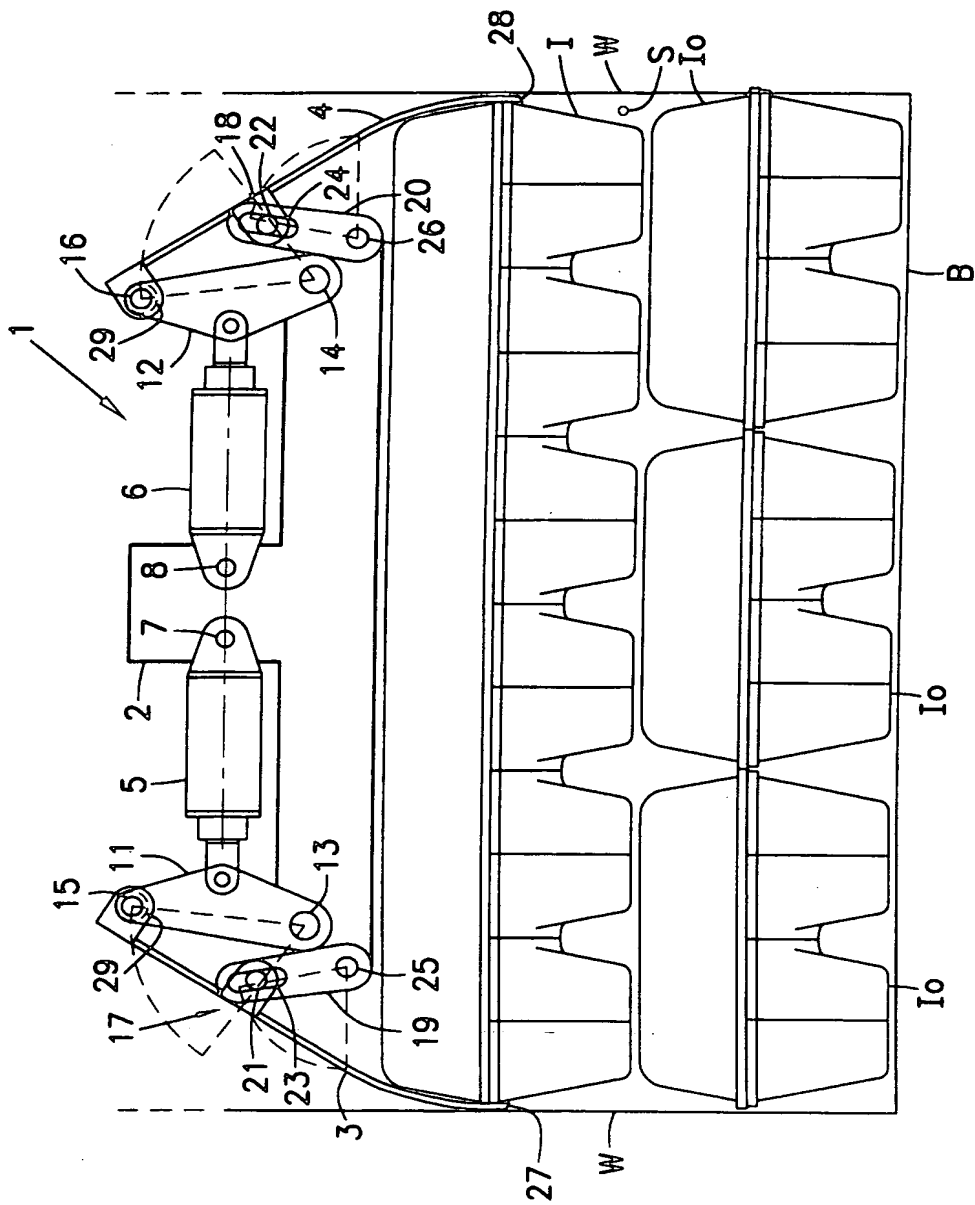


Fig. 4

FIG. 5

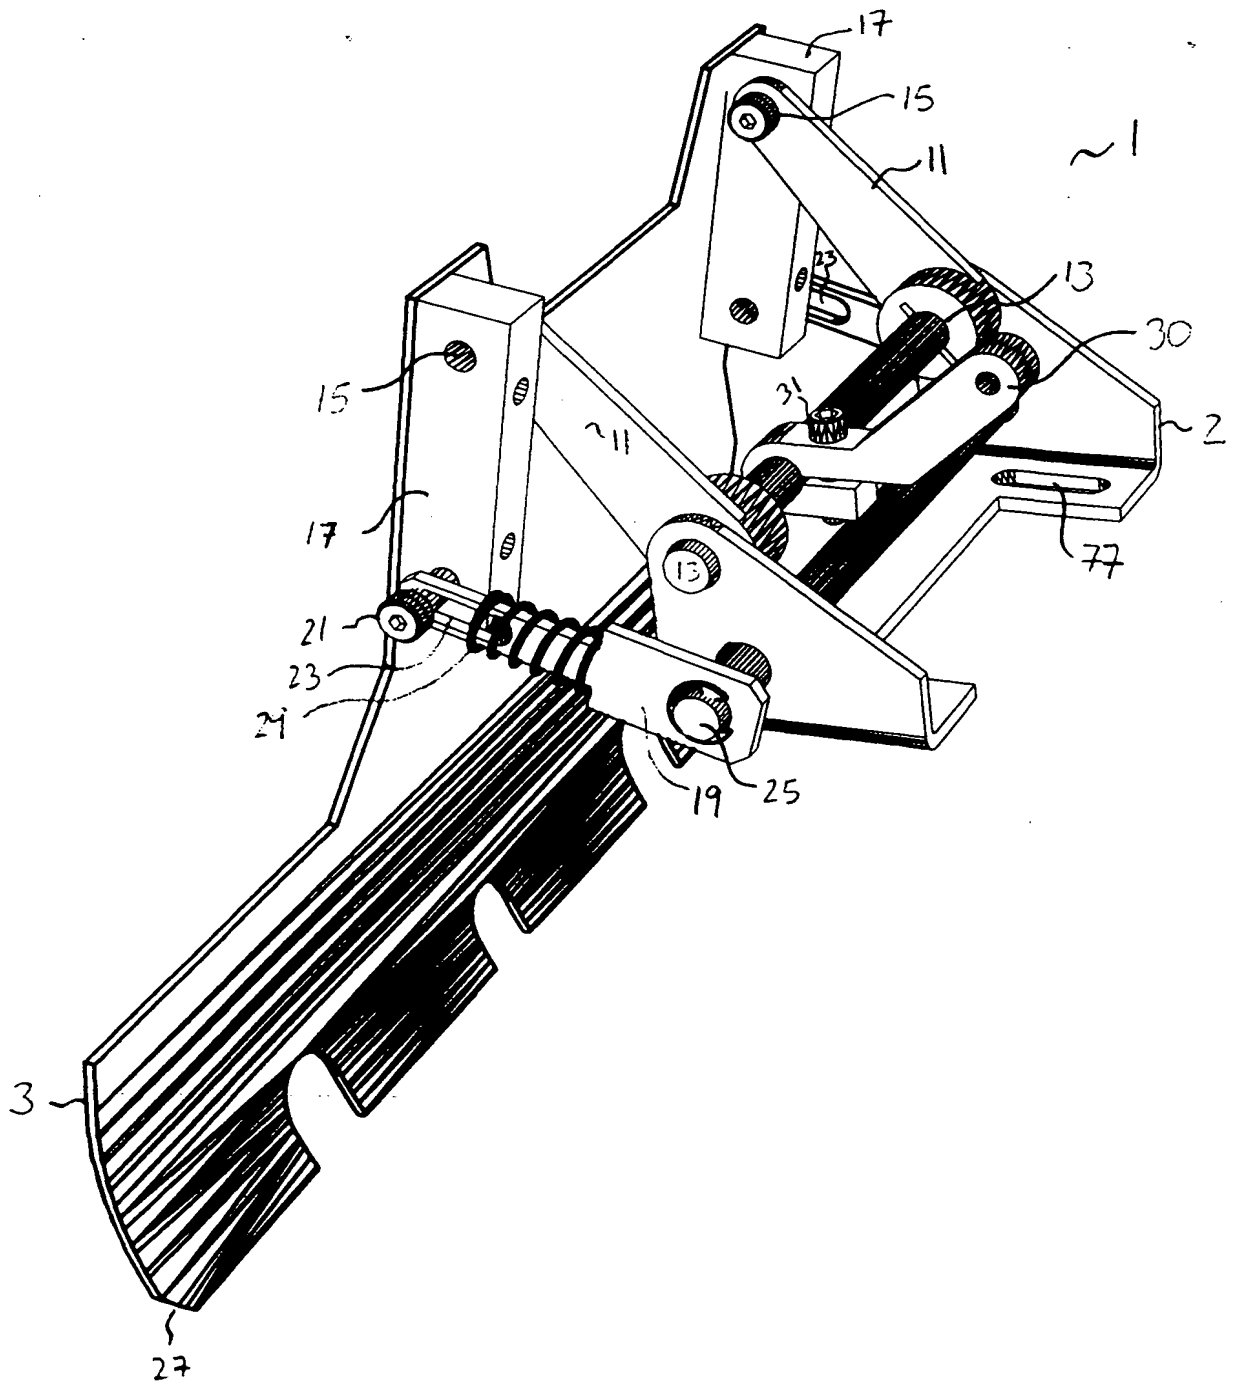


FIG. 5

This diagram shows a mechanical assembly in perspective. A central shaft (11) is supported by a base (1) and a bracket (2). The shaft has a gear (13) and a pulley (19). Two side arms (17) are connected to the shaft via gears (120, 121) and pulleys (123). A large gear (3) is at the bottom right. Other components include a bracket (7), a pulley (77), and various fasteners (15, 29, 30, 31, 77).

FIG. 6

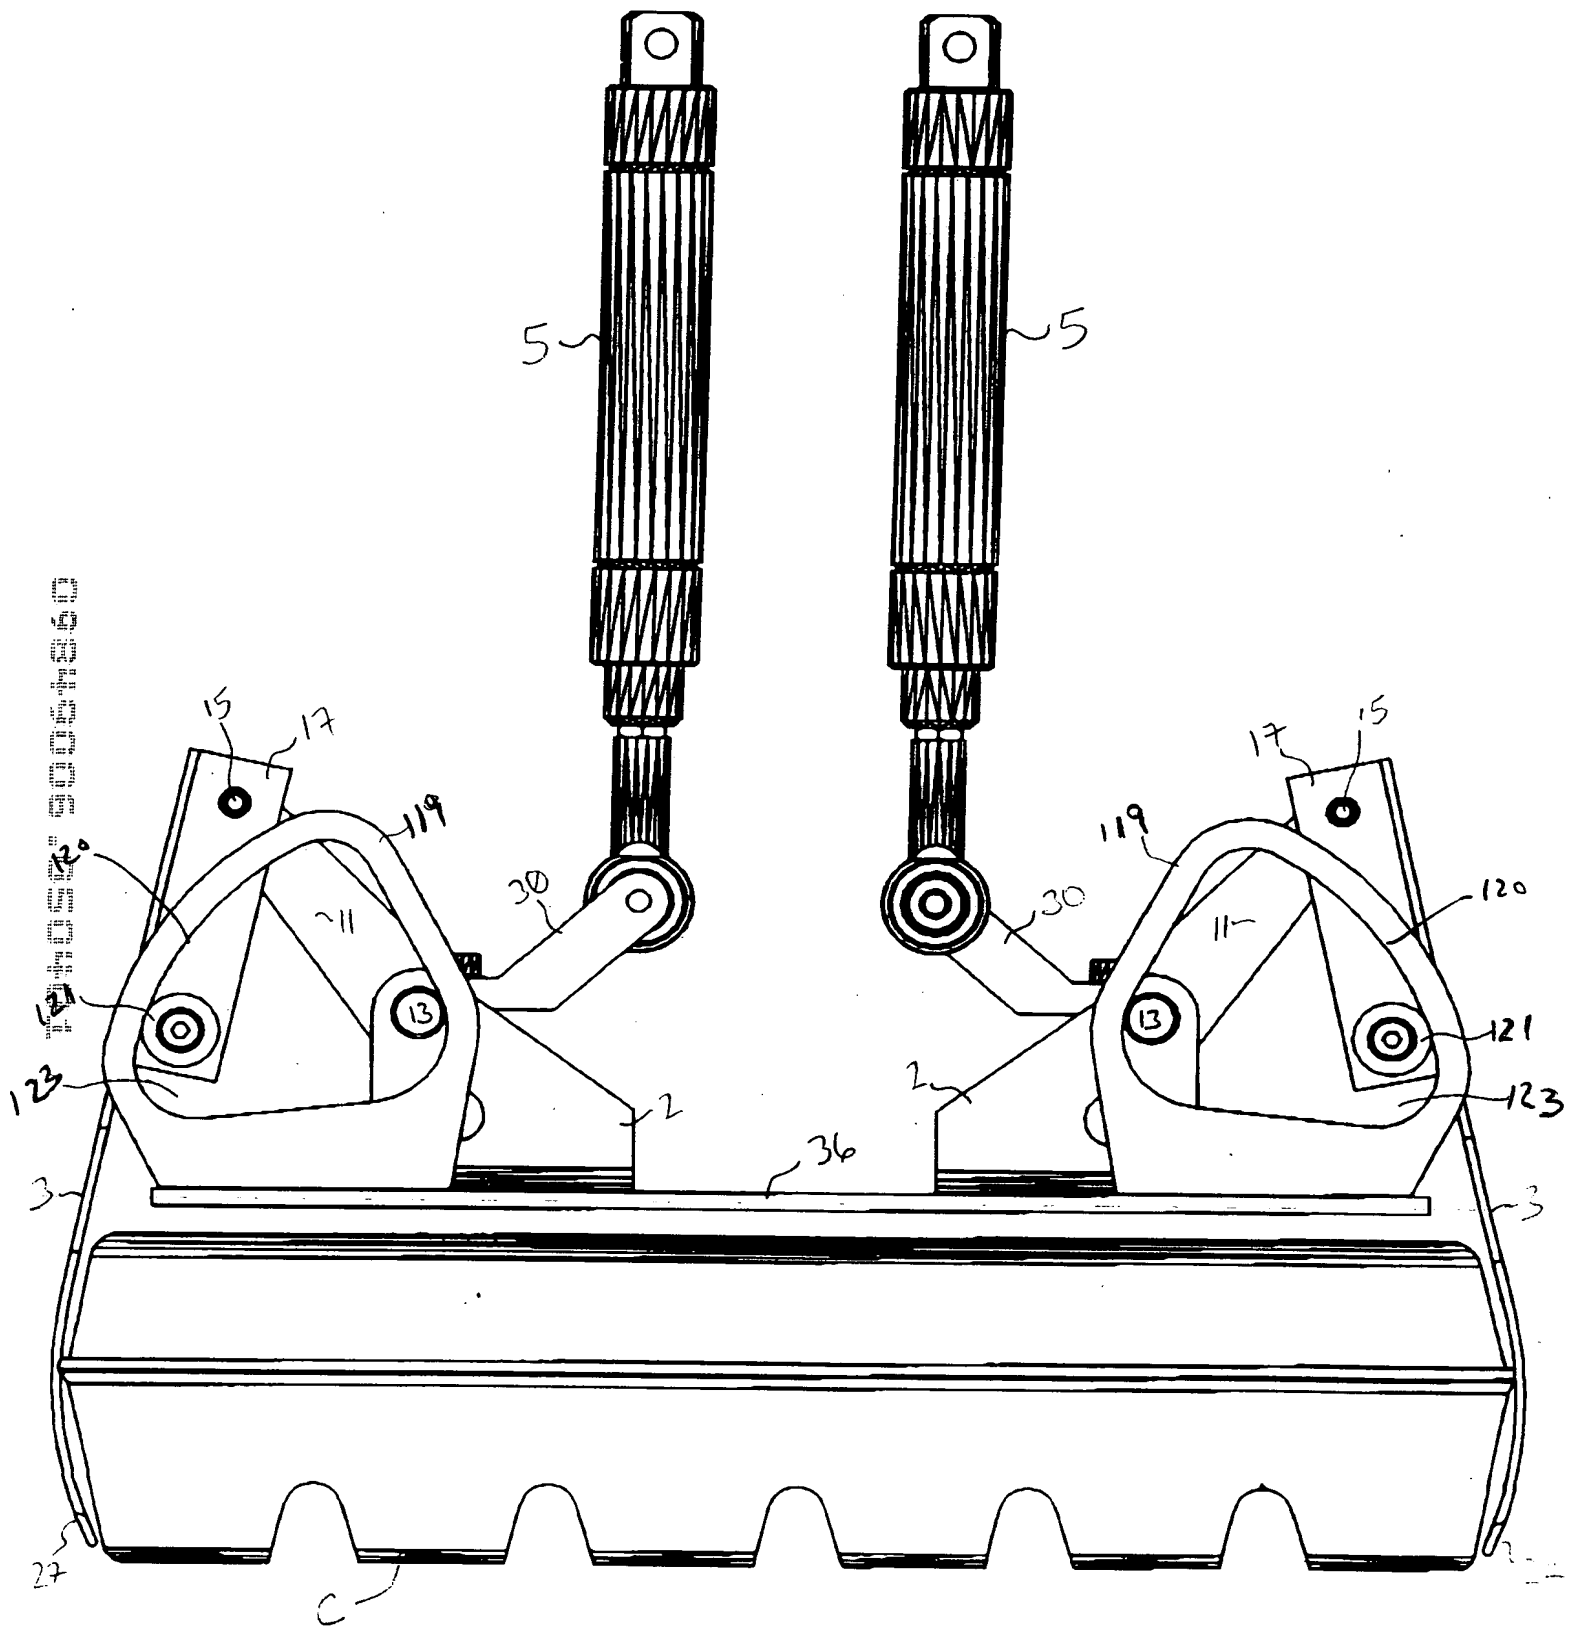
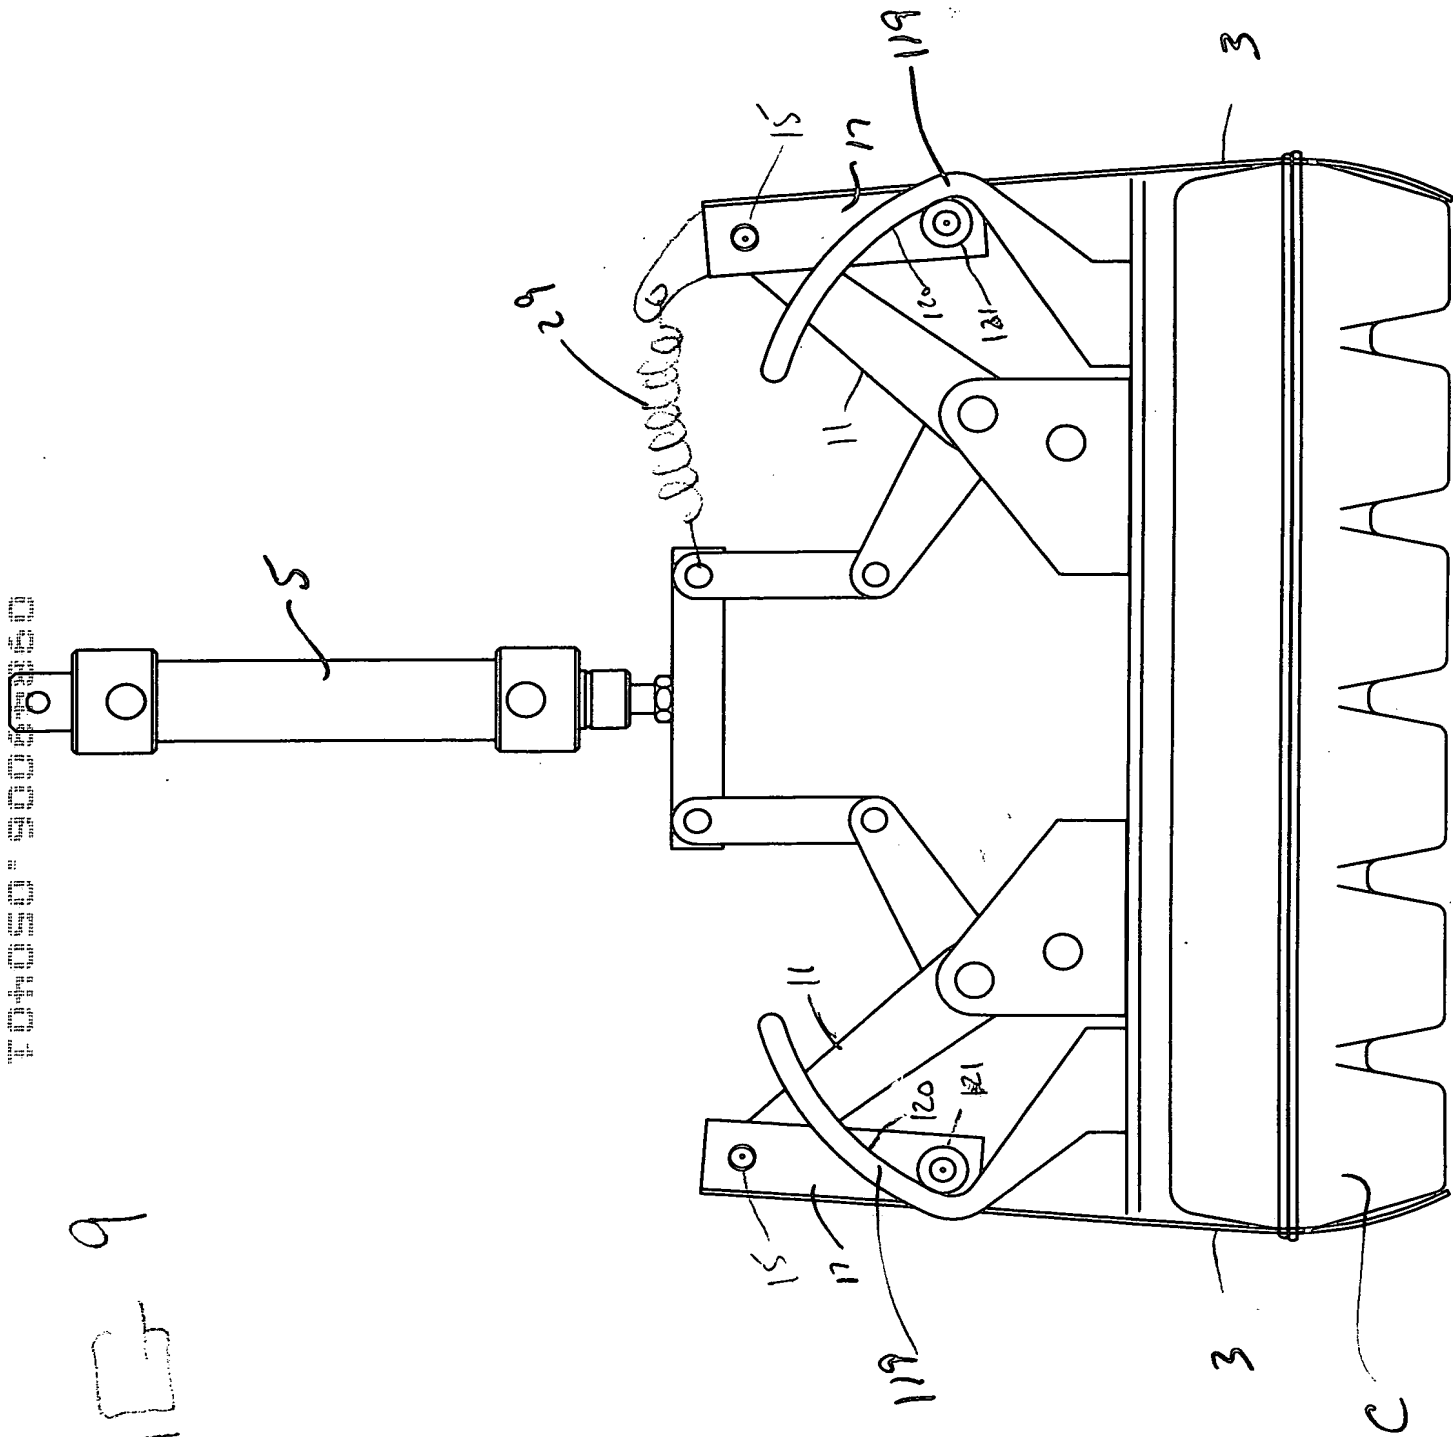


FIG. 7





FIG 9



10

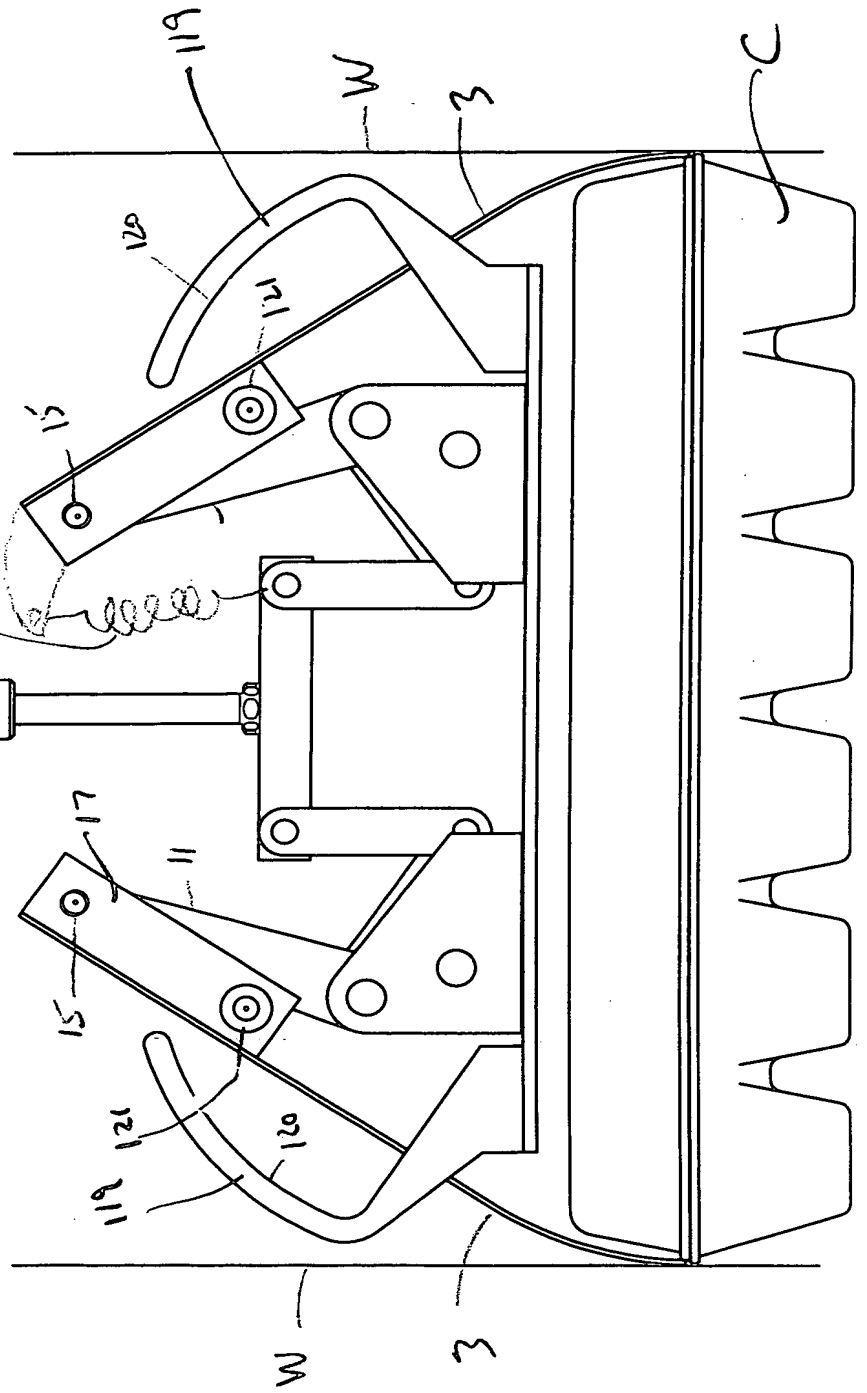
[illegible]

FIG. 11

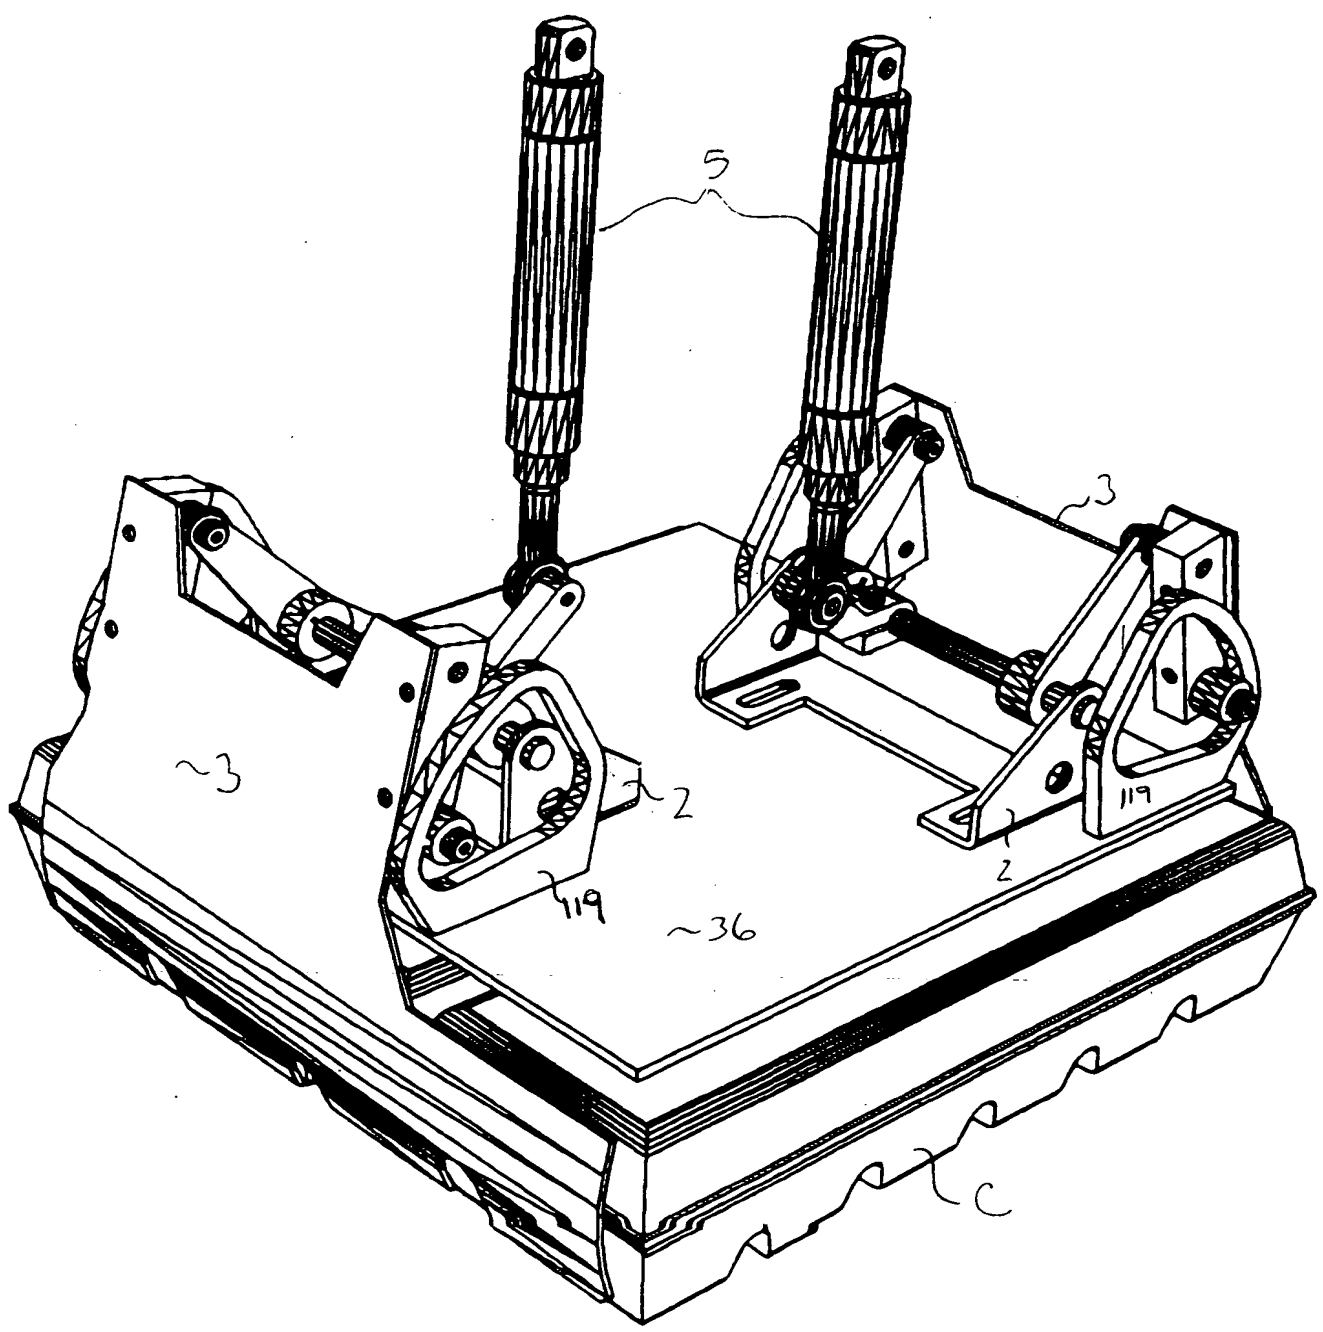


FIG 11

134090 3005480

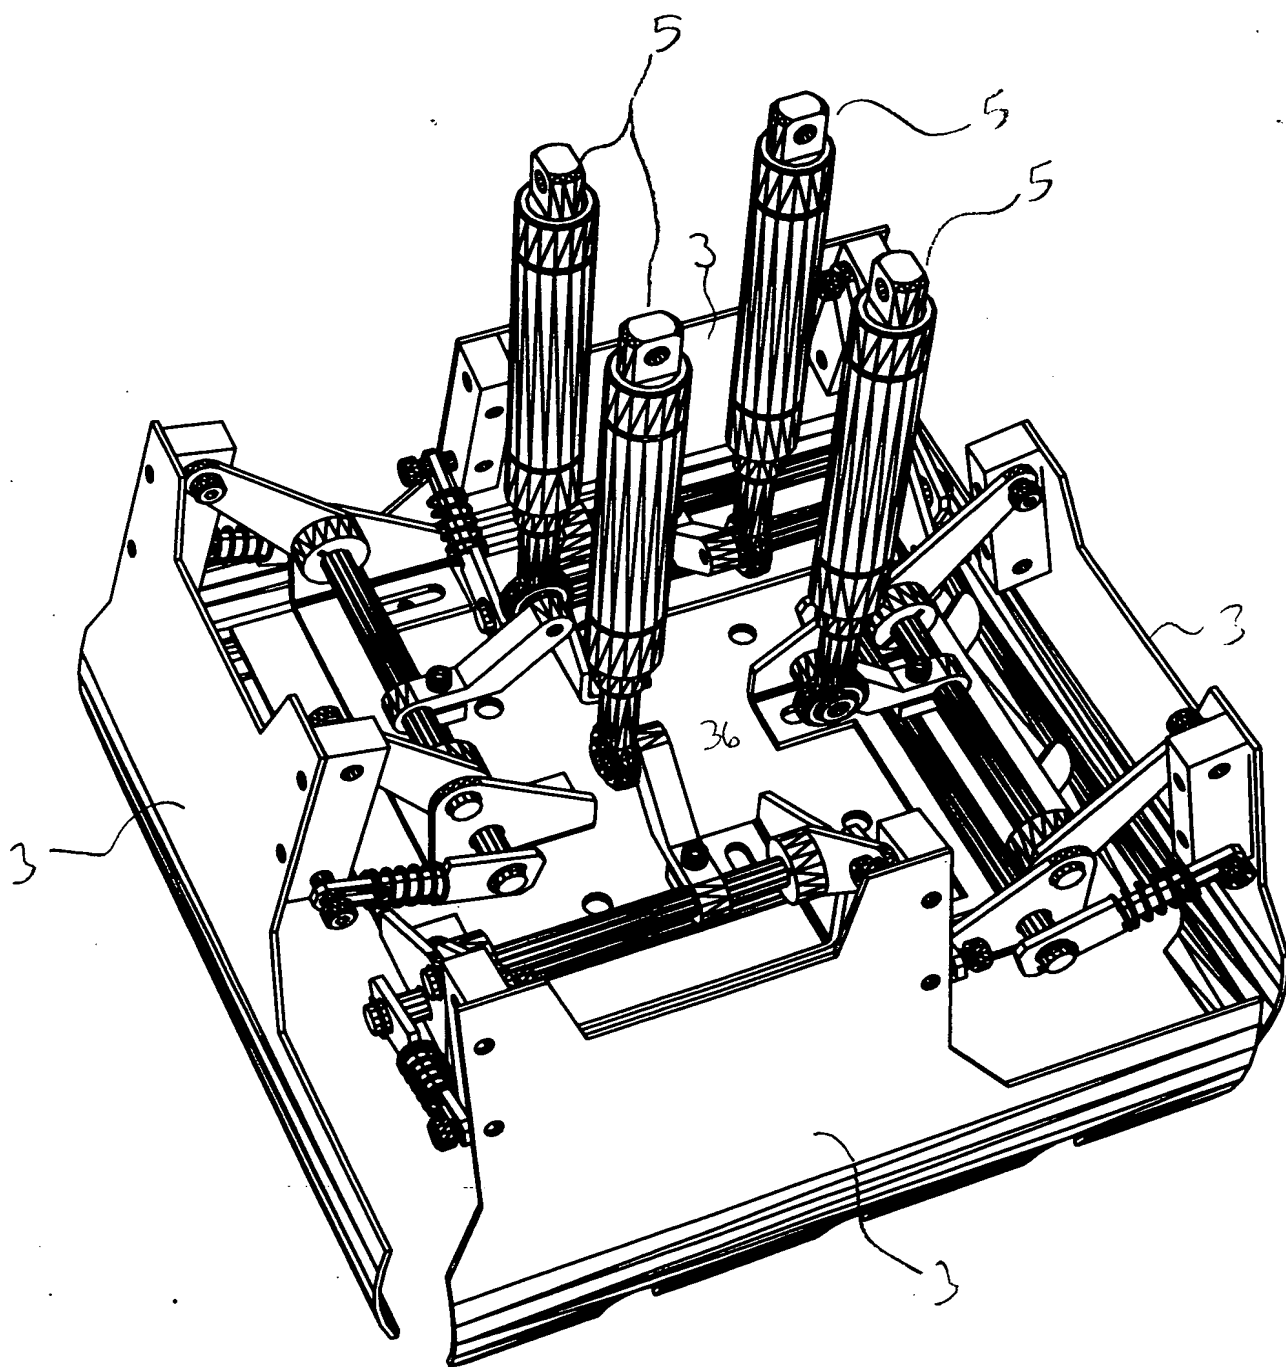


FIG 12

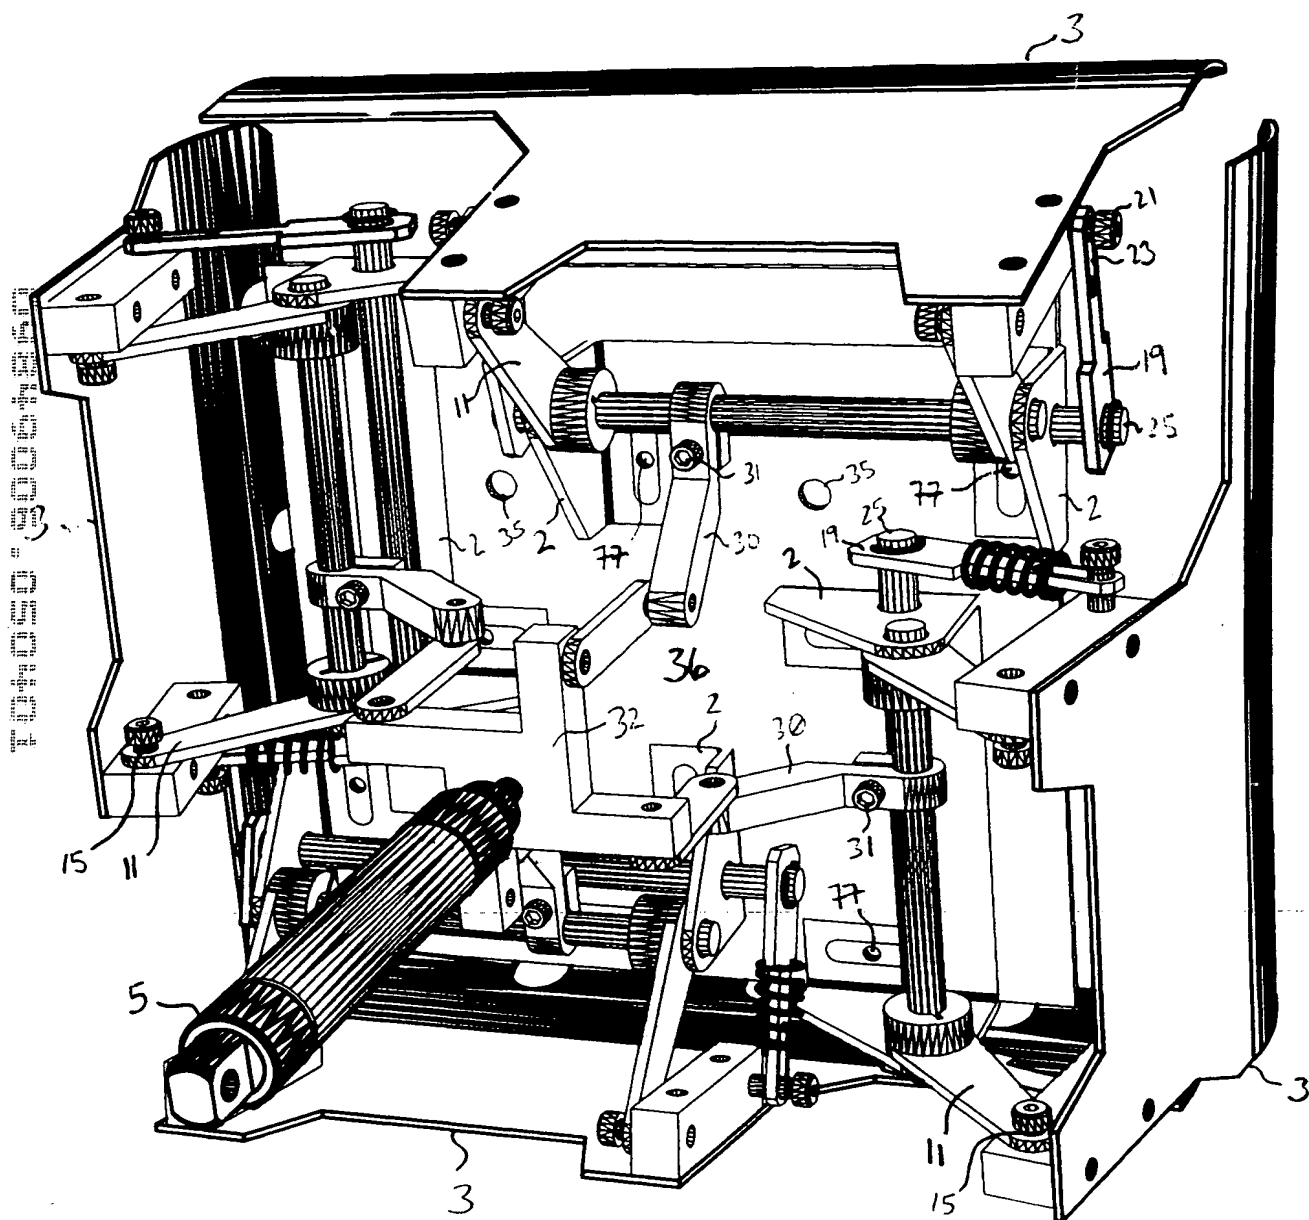


FIG. 13